

Brick built or concrete hoistway*


Standard models

*Clear width between shaft walls




A wide range is available, with dimensions different from the standard models

DL-1C




	1C/1	1C/2	1C/3	1C/4	1C/5	1C/6	
A	800	800	800	1000	1000	1000	Car
B	800	1000	1300	1300	1000	800	
C	1200	1200	1200	1400	1400	1400	Shaft
D	950	1150	1450	1450	1150	950	
P	750	750	750	950	950	950	Door
Kg	250	250	250	250	250	250	Load

DL-1L




	1L/1	1L/2	1L/3	1L/4	1L/5	1L/6	
A	800	1000	1300	1300	1000	800	Car
B	800	800	800	1000	1000	1000	
C	1100	1300	1600	1600	1300	1100	Shaft
D	1110	1110	1110	1310	1310	1310	
P	750	950	950	950	950	750	Door
Kg	250	250	250	250	250	250	Load

DL-2A




	2A/1	2A/2	2A/3	2A/4	2A/5	2A/6	
A	800	800	800	1000	1000	1000	Car
B	800	1000	1300	1300	1000	800	
C	1110	1110	1110	1310	1310	1310	Shaft
D	1000	1200	1500	1500	1200	1000	
P1	750	750	750	950	950	950	Door
P2	750	950	950	950	950	750	Door
Kg	250	250	250	250	250	250	Load

DL-2P



	2P/1	2P/2	2P/3	2P/4	2P/5	2P/6	
A	800	800	800	1000	1000	1000	Car
B	800	1000	1300	1300	1000	800	
C	1200	1200	1200	1400	1400	1400	Shaft
D	920	1120	1420	1420	1120	920	
P	750	750	750	950	950	950	Door
Kg	250	250	250	250	250	250	Load

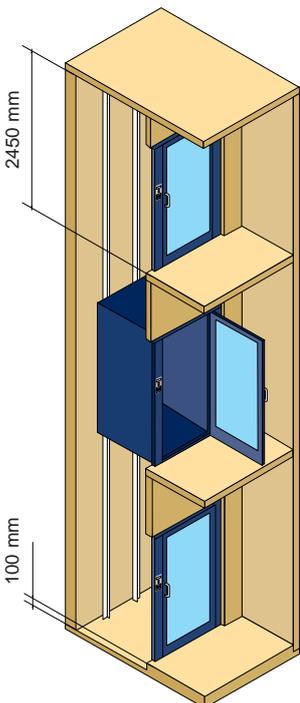

Standard models

MIN PIT	100 mm
MIN HEADROOM	2450 mm
MAX TRAVEL	12 m
MAX NO OF STOPS	5
MAX SPEED	0,15 m/s
RATED LOAD	250 kg
RATED POWER	1,1 kW
SUPPLY VOLTAGE	230 V


The controller and power unit (600x280x1000mm) can be located up to 7 metres from DomusLift. Power consumption is no more than an electrical appliance.



Aluminium shaft**


Standard models

DL - 1 C




	1C/1	1C/2	1C/3	1C/4	1C/5	1C/6	
A	800	800	800	1000	1000	1000	Car
B	800	1000	1300	1300	1000	800	
C	1345	1345	1345	1545	1545	1545	Shaft
D	1070	1270	1570	1570	1270	1070	
P	750	750	750	950	950	950	Door
Kg	250	250	250	250	250	250	Load

DL - 1 L




	1L/1	1L/2	1L/3	1L/4	1L/5	1L/6	
A	800	1000	1300	1300	1000	800	Car
B	800	800	800	1000	1000	1000	
C	1290	1490	1700	1700	1490	1290	Shaft
D	1225	1225	1225	1425	1425	1425	
P	750	950	950	950	950	750	Door
Kg	250	250	250	250	250	250	Load

DL - 2 A



	2A/1	2A/2	2A/3	2A/4	2A/5	2A/6	
A	800	800	800	1000	1000	1000	Car
B	800	1000	1300	1300	1000	800	
C	1290	1290	1290	1490	1490	1490	Shaft
D	1165	1365	1665	1665	1365	1165	
P1	750	750	750	950	950	950	Door
P2	685	750	950	950	750	685	Door
Kg	250	250	250	250	250	250	Load

DL - 2 P




	2P/1	2P/2	2P/3	2P/4	2P/5	2P/6	
A	800	800	800	1000	1000	1000	Car
B	800	1000	1300	1300	1000	800	
C	1345	1345	1345	1540	1545	1545	Shaft
D	1040	1240	1540	1540	1240	1040	
P	750	750	750	950	950	950	Door
Kg	250	250	250	250	250	250	Load

** Fixing of at least 3 uprights at pit, headroom and each floor level



DomusLift requires a pit of 100 mm or an access ramp. A headroom of 2450 mm is enough for tackle ram system and of 2350 mm for telescopic ram

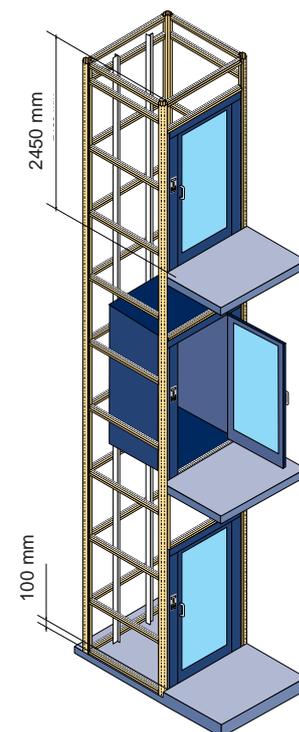

The lifting platform DomusLift complies with the Machinery Directive (98/37/EC) and with all essential law requirements

NEW

DomusLift XL

Cars with bigger dimensions than the standard models (ex. 1100x1400 mm)

XL model

MAX RATED LOAD	600 Kg
MAX TRAVEL	15 m
MAX NO OF STOPS	6